

SPU80 SERIES

80W Desk Top Switching Power Supplies For I.T.E.

Description:


The SPU80 series of AC/DC switching mode power supplies provide 80 Watts of continuous output power. All supplies are UL 94V-1 min compliant, include IEC-320-C14 input for worldwide applications. All models meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL(UL 60950-1), TUV/GS(EN 60950-1) and new CE requirements. All units are 100% burned in and tested.



Features:

- Wide Input Voltage 90 to 264 VAC, 47 to 63 Hz
- IEC-320-C14 Input Inlet
- Single Output
- Output Voltage Available From 11VDC Thru 48VDC
- Optional Output Connector (See appendix)
- Input Surge Current, Over Voltage And Over Load protection
- Power Factor Correction
- Output Voltage Protection(Crowbar Design)
- Splash proof
- Class I Insulation
- 2 year warranty

Safety Approvals :

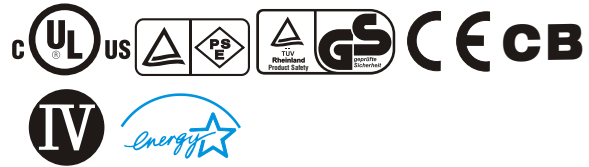

Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Input Voltage	Operating Voltage	90		264	VAC
Fin	Input Frequency		47		63	Hz
PFC	Power Factor Correction	Io=Full load, Vin=90~260VAC	0.95	0.97	1.0	
Wo	Output Power Range	Vin=90 to 264 VAC	0		80	W
Vo	Output Voltage Range		See rating Chart			V
Io	Output Current Range		See rating Chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC			1.07	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC			0.5	A
Irl	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		12	15	A
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC		26	30	A
Eff	Efficiency	Io=Full load, Vin=230VAC	80	83	88	%
REG-i	Line Regulation	Io=Full load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC		3	7	%
OVP	Over Voltage Protection		112		132	%
OCP	Over Current Protection		110		150	%
Ttr	Transient Response	Io=Full load to Half Load, Vin=100VAC			4	mS
Thold	Hold-Up Time	Io=Full load, Vin=110VAC	16			mS
Ts	Start Up Time	Io=Full load, Vin=100VAC	0.3	1	2	S
Vp-p	Ripple & Noise (Peak to Peak)	Full load, Vin=90VAC		0.5	1	%
Ilk	Safety Ground Leakage Current	Io=Full load, Vin=240VAC		0.5	0.75	mA
Tc	Temperature Coefficient	All output	-0.04		0.04	%/°C

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		0		70	°C
Tstg	Storage Temperature		-40		85	°C
Hr	Relative Humidity		5		95	%
Pd	Derate linearly from 100% load at 40°C to 50% load at 70°C					

SPU80 SERIES

80W Desk Top Switching Power Supplies For I.T.E.

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{ps}	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242			VDC
V _{pg}	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2121			VDC
R _i	Isolation Resistance	Test Voltage=500VDC	50			M Ω
CISPR	EMI requirements for CISPR-22	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-15	Vin=110VAC	B			CLASS

Output Voltage And Current Rating Chart (Single Output) :

Model Number	Out Voltage	Out Current	Total Regulation	Maximum Out Power
* SPU80-105	11 ~ 13 VDC	7.27 ~ 6.15 A	5%	80W
* SPU80-106	13 ~ 16 VDC	6.15 ~ 5.00 A	5%	80W
* SPU80-107	16 ~ 21 VDC	5.00 ~ 3.80 A	5%	80W
* SPU80-108	21 ~ 27 VDC	3.80 ~ 2.96 A	5%	80W
* SPU80-109	27 ~ 33 VDC	2.96 ~ 2.42 A	5%	80W
SPU80-110	33 ~ 40 VDC	2.42 ~ 2.00 A	5%	80W
SPU80-111	40 ~ 48 VDC	2.00 ~ 1.66 A	5%	80W

Mark "*" means "PSE approval"

The output voltage under 30V had been approved by TUV/PSE

Mechanical Specifications:

Note:

1. Dimensions are shown in inches or mm.
2. Weight: 600-700gs approx.
3. Optional output connector: See page Appendix.

