


- Plug-in unit
- Fixed output voltages
- Thermal fuse in transformer
- Available as standard version with bridge rectifier and capacitor
- Exchangeable output plugs
- Plugg-inn enhet
- Faste utgangsspenninger
- Termosikring i transformator
- Standardversjonen leveres med brolikeretter og kondensator
- Utskiftbare plugger




Technical specifications

Input voltage:
Output voltage:
Max. output power:
Insulation class:
Electrical safety standard:
EMC standards
• Emission:
• Immunity:
Output terminals
Cord with/without plug:
Dimensions excl. plug (LxWxH):
Weight:

Tekniske data

Inngangsspenning: 230 VAC +6/-10%, 50/60Hz
Utgangsspenning: 3-42 VDC
Maks. utgangseffekt: 8 W
Isolasjonsklasse: II
Elektrisk sikkerhetsstandard: EN 60065, EN 60950
EMC standarder
• Emisjon: EN 61000-6-3
• Immunitet: EN 61000-6-1
Utgangsterminaler
Sek. ledning med/uten plugg: Accessories /Tilbehør
Mål uten plugg (LxBxH): 95 x 51 x 57 mm
Vekt: 390 g

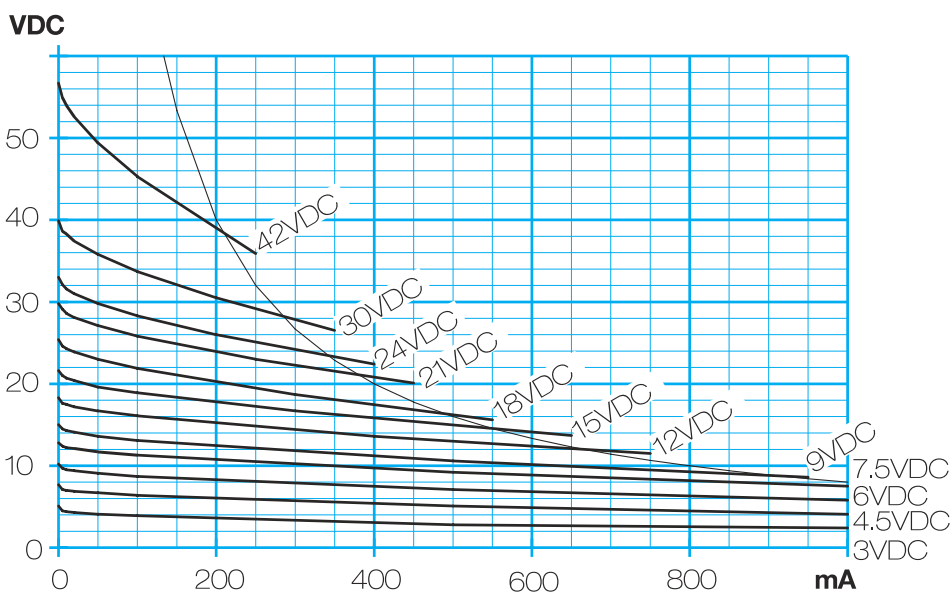

Voltage version (VDC) Spenningsversjoner (VDC)	Max. power (W) Maks. effekt (W)
3	2,0
4,5	4,0
6	6,0
7,5	6,5
9	7,0
12	7,5
15	8,0
18	7,5
21	8,0
24	8,0
30	8,0
42	8,0