

EPU60A SERIES

60W Desk Top Switching Power Supplies.

Description:

The EPU60A series of AC/DC switching mode power supplies provide 60 Watts of continuous output power. All supplies are UL 94V-1 min compliant. All models meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL (UL 60950-1:2nd Edition), TUV/GS (EN 60950-1:2nd Edition) and new CE requirements. All units are 100% burned in and tested.



Features:

- Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- IEC-320-C14 Input Inlet
- Single output
- Optional Output Connector (See appendix)
- Class I
- 1 year warranty

Safety Approvals :



Agree to apply for the PSE if order on hand

Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit.
Vin	Safety Approvals Input Voltage Range		100		240	VAC
	Operate Voltage Range		90		264	VAC
fin	Input Frequency		47		63	Hz
Po	Output Power Range	Vin=90 to 264VAC	0		60	W
Vo	Output Voltage Range		See rating chart			V
Io	Output Current Range		See rating chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC			1.6	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC			0.7	A
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC			105	A
Eff	Efficiency	Io=Full Load, Vin=230VAC	See rating chart			%
REG-i	Line Regulation	Io=Full Load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC		3	5	%
OCP	Over Current Protection		110		150	%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC			4	mS
Thold	Hold-Up Time	Io=Full Load, Vin=110VAC	10			mS
Ts	Start Up Time	Io=Full Load, Vin=100VAC		2	3	S
Vp-p	Ripple & Noise (Peak to Peak)	Full Load, Vin=90VAC		1	2	%
Ilk	Safety Ground Leakage Current	Io=Full Load, Vin=240VAC		0.5	0.75	mA
TC	Temperature Coefficient	All output	-0.04		0.04	%/°C
Pno	No-Load Power Consumption	No load, Vin=230VAC	See rating chart			W

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		0	40	70	°C
Tstg	Storage Temperature		-40		85	°C
Ho	Operating Humidity		0		95	%
Hr	Storage Humidity		0		95	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1M			Hrs
Pd	Derate linearly from 100% load at 40°C to 50% load at 70°C					

EPU60A SERIES

60W Desk Top Switching Power Supplies.

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242			VDC
Vpg	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2121			VDC
Ris	Isolation Resistance	Test Voltage=500VDC	50			MΩ
CISPR	EMI requirements for CISPR-22	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-15	Vin=120VAC	B			CLASS


Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total ① Regulation	Efficiency (min.)	Maximum Output Power	Pno (max.)
* EPU60A-105	12 ~ 13 VDC	5.00 ~ 4.61 A	5%	87%	60W	0.5W
EPU60A-106	13 ~ 16 VDC	4.61 ~ 3.75 A	5%	87%	60W	
EPU60A-107	16 ~ 21 VDC	3.75 ~ 2.85 A	5%	87%	60W	
EPU60A-108	21 ~ 27 VDC	2.85 ~ 2.22 A	3%	87%	60W	
EPU60A-109	27 ~ 33 VDC	2.22 ~ 1.81 A	3%	87%	60W	
* EPU60A-110	33 ~ 40 VDC	1.81 ~ 1.50 A	3%	88%	60W	
* EPU60A-111	40 ~ 48 VDC	1.50 ~ 1.25 A	3%	88%	60W	

Mark " * " means approved by PSE.

- ① EPU60A-105~107 are required to use AWG#16 / 4FT output cable.
- EPU60A-108~109 are required to use AWG#18 / 4FT output cable.
- EPU60A-110~111 are required to use AWG#20 / 4FT output cable
- The regulation will be changed by modified output cable

Mechanical Specifications :

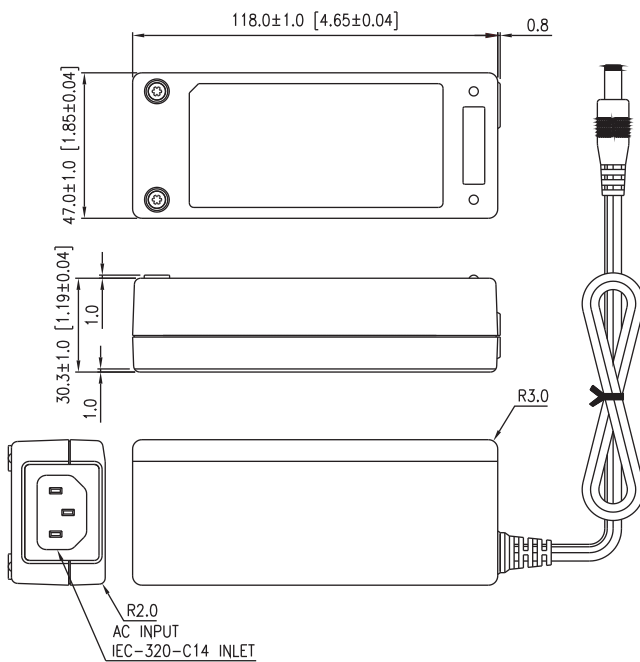

Note:

1. Dimensions are shown in mm.
2. Weight: 340gs approx.
3. Optional output connector: See page Appendix.