


15W Single Output Open Frame Series

- Universal AC input / full range
- High reliability
- Miniature PCB structure
- Approvals: UL/CUL/CE
- 100 x 46.2 x 22(mm)



- Protections: overload/ over voltage/ over temperature/ short circuit
- Free air cooling convection
- 5 years limited warranty

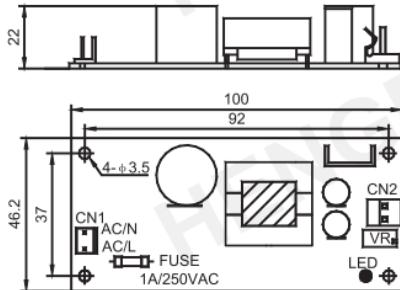

AC input voltage range	85~264VAC (120~370VDC)
Inrush current	cold start, 15A/115V, 30A/230V
Output voltage adjust range	± 10%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	clamping by zenor diode
Over temp. protection	IC, Tj: 135°C, power shutdown
Withstand voltage	I/P -O/P:3.0KVAC/1min;I/P-F/G:1.5KVAC/1min O/P-F/G:0.5KVAC/1min
Rise, Hold up time	50ms, 20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards.....	GB4943, UL60950, EN60950
EMC standards.....	GB9254, EN55022 classB, EN61000
Connection	2P/ 5.08mm, 2P/ 3.96mm pitch
Weight	0.09kg/pcs

Model	DC Output		Load regul.	R&N	Efficiency
HF15W-SPL-5	5V	3.0A	0.5%	80mV	73%
HF15W-SPL-12	12V	1.3A	0.5%	120mV	82%
HF15W-SPL-24	24V	0.65A	0.5%	150mV	81%
HF15W-SPL-48	48V	0.32A	0.5%	150mV	85%

* 3~48VDC output all available.