

Impact-D 162A




Features

The Impact-D 162A is a compact, DIN Rail mountable, low power embedded system, utilising the superb Intel Skylake Mobile processing technology.

Key features:-

- 3 year warranty
- 15 Year life cycle
- Din Rail mount

Dimensions

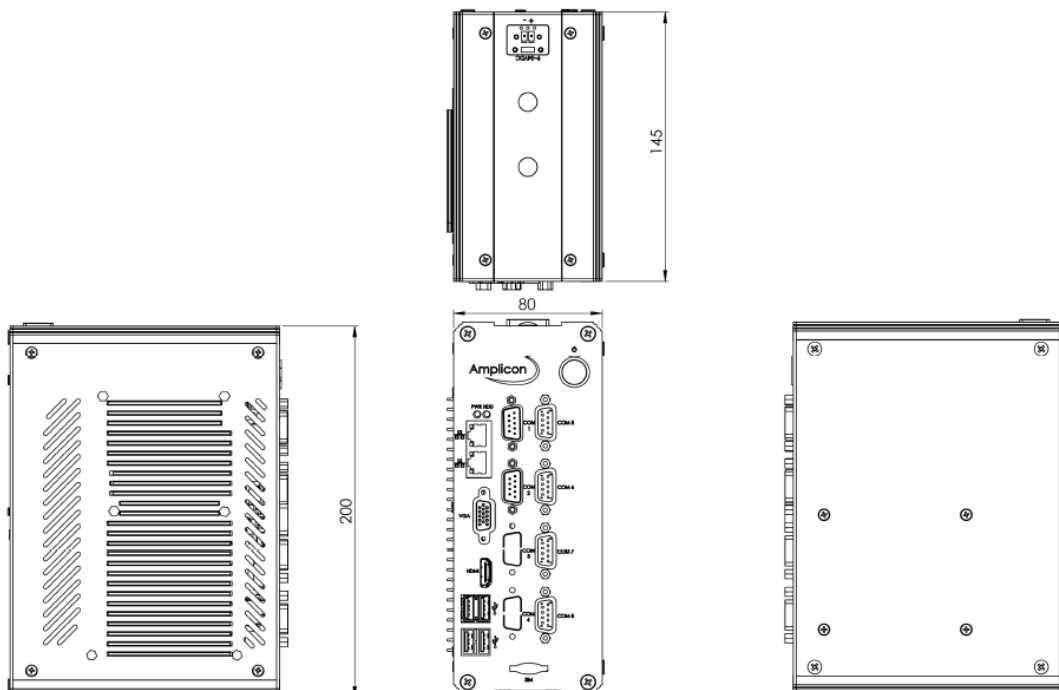

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com


Impact-D 162A

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Specifications

Hardware Specification	CPU: Intel I core i5-6300U SOC Main memory: Single DIMM 4GB SODIMM DDR4 (max: 16GB) LAN: Dual integrated 10/100/1000	Mechanical	Design: Rugged compact embedded design Cooling: Fanless design Construction: Extruded Aluminium Colour: Black Dimension: 80 x 200 x 145mm (W x H x D) Gross Weight: 1.3kg
BIOS	AMI	Environmental Operation	Acoustic noise: Near silent operation Operating Temperature: 0°C to 60°C Humidity: 0 to 60% non-condensing
Display	HDMI: 4096x2160 @ 24Hz VGA: 1920x1200 @ 60Hz	Environmental Storage	Temperature: -40°C to 75°C Humidity: 5% to 95% RH Non-condensing
Storage	1 x 2.5" SSD 1 x mSATA Colay mPCIe	Certifications	CE/UKCA
System Expansion	2 x Full size mPCIe (1 with SIM)		
Supported O/S	Windows 7 Pro / Windows 10 Pro / Windows 10 IoT / Linux		
External Interfaces	2 x USB 3.0 Front 2 x USB 2.0 Front 2 x RJ45 LAN 4 x RS232/422/485 1 x HDMI 1 x VGA		
LED's and Switches	Power (PC on LED) Hard disk access LED ATX system control switch		
Main board Power options	Supports DC input: 9-32VDC on Phoenix connector		

Rear I/O plate

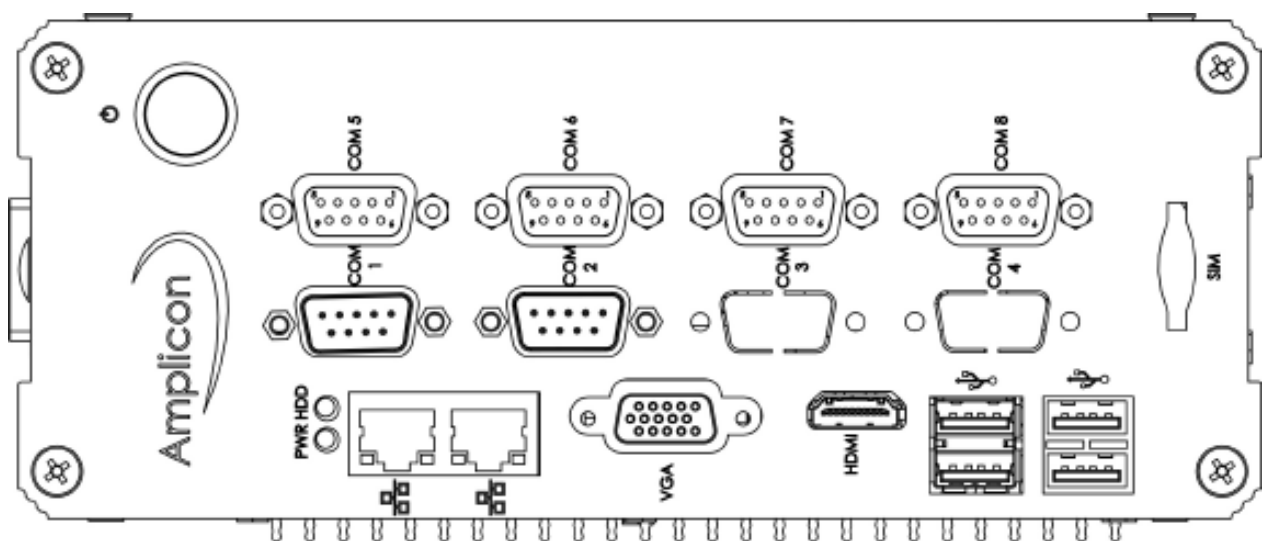

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com