

# UMTS/HSDPA router UR5 v2

› Producer website  
[www.conel.cz](http://www.conel.cz)

*true mobility*



max. 3,6 Mb/s downlink  
384 Kb/s uplink

**speed**

IPsec • OpenVPN • L2TP • GRE

**VPN**

2 × Ethernet 10/100 • serial ports • USB Host

**ports**

2 × SIM • data limit and roaming switch

**SIM**

## TYPICAL APPLICATIONS

### Mobile applications

- › Traffic/security cameras
- › Kiosks, ATM, ticketing machines
- › Meteorology/seismology

### Transport

- › Trucks/containers
- › Trains, river boats, taxi cars

### Industry & IT

- › Remote machine service & control
- › LAN and PC connection
- › PLC wireless connection, meter connection
- › SCADA connection

### Energy

- › Wind power stations, solar panels
- › Gas distribution systems
- › Water distribution systems

Selected case studies see at  
<http://www.conel.cz>

## Take advantage of fully modular concept

Buy exactly what you need

Metallic housing      Plastic housing



version **Basic**  
1 × SIM card holder  
1 × optional port

version **Full**  
2 × SIM card holder  
2 × optional port



Optional back up of primary SIM card  
Ethernet 10/100  
RS232, RS485, MBUS  
Optional  
Optional  
Ethernet 10/100, RS232, RS485, I/O, MBUS  
Ethernet 10/100

Optional port is delivered on request of customer – it is left blank (connector only) or equipped by one of the interfaces marked above.

UMTS/HSDPA router UR5 v2 interconnects large variety of equipment into Internet or Intranet – computers, cameras, ticketing machines, controlling systems, complete LAN networks etc.

UMTS/HSDPA router UR5 v2 enables transfer of your data at high speed rate – max. downlink 3,6 Mb/s and uplink 384 Kb/s. This is an effective speed for example in picture transfer from cameras, for ticketing and parking machines or various kinds of kiosks.

The main benefit of UR5 v2 is high communication speed and a short response rate thanks to advanced UMTS/HSDPA technology. Router is designed to work reliably in the professional applications requesting large data transmission loads in a short time interval via mobile operator wireless network.

for devices with interface

**ethernet**  
USB ■ RS232 ■ RS485 ■ MBUS ■ I/O

## Networking

- DHCP – automatic IP addressing in LAN network
- NAT/PAT – IP address and ports translation between inside/outside network
- VRRP – virtual backup router function
- DynDNS client – access to the router with a dynamic IP address
- Dial-in – the ability to communicate over dial CSD call
- PPPoE Bridge – PPP frames encapsulation inside ETH frames

## VPN tunnelling

- IPsec, OpenVPN, L2TP – secure encrypted tunnels
- GRE tunnel – simple tunnel without security measures

## Configuration and diagnostics


- HTTP server – configuration via web server
- Telnet – configuration and access to the file system
- SNMP – router diagnostics, communication with I/O and M-BUS
- GPRS state signalization by LED
- On-line info on GSM signal status (level, cell, neighbours)
- SMS info – power on, GPRS connection or disconnection
- SMS control – on/off GPRS connection, switch SIM, I/O etc.
- Transferred data counting, one more APN as backup
- Remote router group configuration change, switching among configuration profiles
- SSH – encrypted configuration and access to the file system

## Other functions and features

- Linux based, possibility to program your own application
- NTP client, NTP Server – time synchronization
- SMS communication – AT commands on RS232, Ethernet and I/O
- M-RAM memory inside – router statistic's saving into memory

## Extensions

- 2 × optional port: Port 1 and Port 2
- Port 1: Ethernet 10/100, RS232, RS485/RS422, M-BUS Master or CNT (I/O) - 2 × binary input, 2 × counter / binary input, 2 × analog input, 1 × binary output)
- Port 2: RS232, RS485/RS422, M-BUS Master
- Optional ports delivered on request of customer
- 1 × SIM card holder
- Metallic or plastic cover
- R-SeeNet – monitoring and management SW for routers

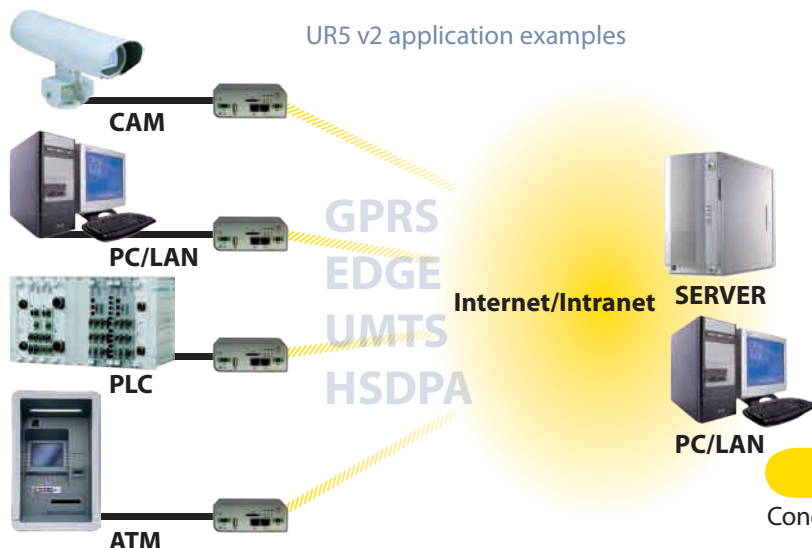

Version in plastic housing



Version SL - metal housing

### UR5 v2 communication parameters

Frequency bands	<ul style="list-style-type: none"> <li>• Dual-Band UMTS: 900 / 2100 MHz</li> <li>• Dual-Band GSM: 900 / 1800 MHz</li> </ul>
-----------------	---

UMTS/HSDPA	max. download 3,6 Mbps max. upload 384 Kbps
------------	--

### General overview

Temperature range	from -30 °C to +60 °C
Power supply	10 V to 30 V DC
User interface	1 × Ethernet (10/100 Mbit/s) 1 × USB 2.0 type A Host 1 × I/O (binary input/output) 2 × Optional port – on request of customer one of the following interfaces: Port 1: <ul style="list-style-type: none"> <li>• Ethernet 10/100</li> <li>• RS232</li> <li>• RS485/RS422</li> <li>• M-BUS</li> <li>• inputs/outputs (I/O)</li> </ul> Port 2: <ul style="list-style-type: none"> <li>• RS232</li> <li>• RS485/RS422</li> <li>• M-BUS</li> </ul>
Dimensions	42×76×113 mm (DIN rail 35 mm)
Weight	150 g
Antena connector	SMA – 50 Ohm
Standards	comply CE EN 301 511, v9.0.2 EN 301 908-1&2, v3.2.1 ETSI EN 301 489-1 V1.8.1 EN 60950-1:06 ed. 2 + A11:09

## contact

Conel s.r.o. • Sokolská 71 • 562 04 Ústí nad Orlicí • Czech Republic  
 Tel.: +420 465 521 020 • Fax: +420 465 521 021  
 E-mail: info@conel.cz • Web: www.conel.cz